



LED LINKABLE LINEAR LIGHT



100lm/W

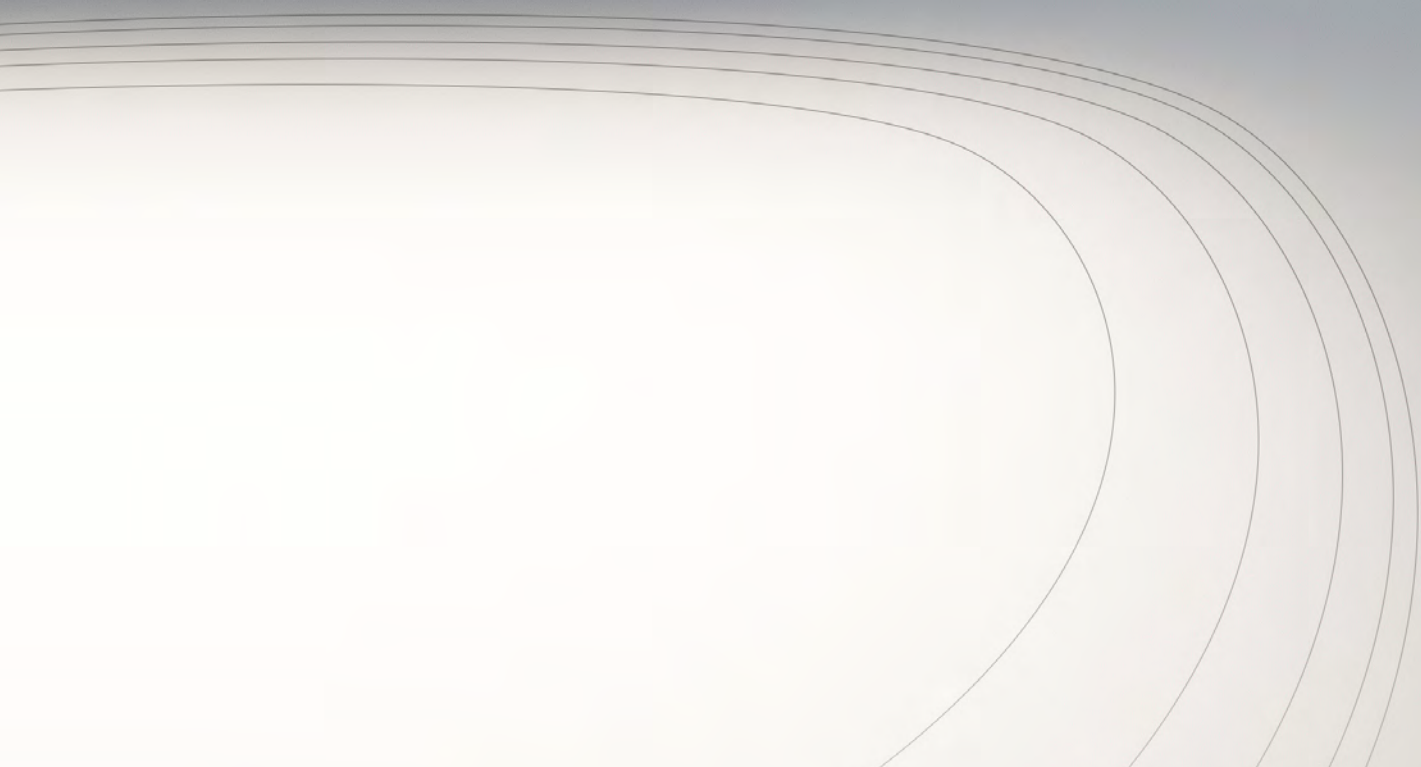

FINISH: White Silver Black **CCT:** 2700K or Tricolour (3000K/4000K/5000K)

DIMMING: Triac 1-10V DALI Smart lighting

LED LINEAR LIGHT High quality aluminum case with linkable ends for rapid deployment and ease of installation, high light transmittance PMMA cover. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.


Custom fitting and colours temperature available upon request. UP/DOWN configurations available upon request. Emergency available upon request

TZ-5575

Installation Type	Surface mount/Suspended
Wattage	30W/M
Beam Angle	100°
Lumen (lm)	100lm per watt
CRI	<90
MacAdam Ellipse	3
Lifespan	50000hrs
Size (WxHmm)	55x75

Watts Per Length (mm) (36W) 1200mm /(60W) 2000mm /(90W) 3000mm


DIMENSION

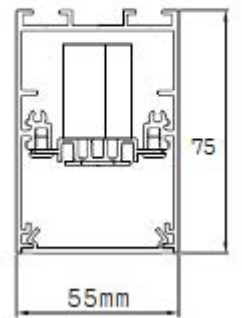


LINKABLE STYLES



Accessories

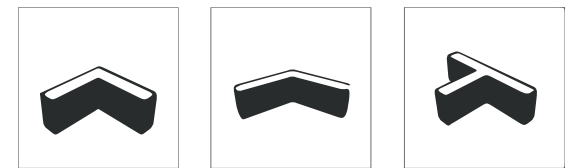

L connector 120° connector T connector

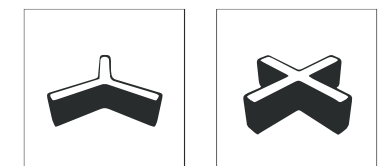

Y connector Cross connector